


ARIOMAT[®]

Woodline

WHERE **WOOD** BECOMES
CRAFTSMANSHIP



www.arimat.com



www.ariomat.com

Ariomat is a factory brand of Sobeltec nv
Klein Frankrijkstraat 43, 9600 Ronse
Belgium.

www.ariomat.com | +32 (0)55 230 600 | info@ariomat.com




Innovator in durable surface technology

75+ years of experience in production
and Research & Development

Part of Cordeel Group
HQ in Belgium

Made in Belgium



**we help
you
create
future-proof
buildings**

The Ariomat product range consists of high quality finished materials. We are committed to develop durable and sustainable systems.

ABOUT US

Ariomat is a Belgian brand that caters to the global professional market of decorative finishings for indoor and outdoor use. Through our extensive knowledge in R&D and professional infrastructure, we are able to supply our customers with high-quality and future-proof products that are durable and unique. Through our passion for coatings, we have developed technologies that are one-of-a kind and provide our customers with the right answers to their needs. All our products are made solely in our production facility in Belgium and exported to our partners worldwide.

GLOBAL PRESENCE

The products of Ariomat are being sold and distributed throughout countries inside and outside of Europe. We collaborate with seasoned professionals with whom we have an excellent relationship. As a manufacturer, we strive towards top quality products and service and we believe in a long-term relationship with our current and new partners.

INNOVATION & R&D

With years of experience in Research and Development, we continue to strive to develop sustainable, environmentally friendly products. Our existing and new developments are always developed with durability and sustainability in mind.

WOODLINE

We offer a solid range of durable and sustainable products for the finishing, protection and maintenance of wooden surfaces, both indoor and outdoor. With our range of waterbased coloured and aging stains, (coloured) hardwax oils and state-of-the-art

waterbased varnishes, we aim at professionals who are active in the woodworking, furniture and flooring industry. With our outdoor waterbased Hydro Shield range, we provide the sector of outdoor carpentry and joinery a unique product range.

INFO & CONTACT

www.ariomat.com | +32 (0)55 230 600 | info@ariomat.com

MISSION

To inspire architects and industry professionals around the world in creating and renovating future-proof buildings with innovative and sustainable surface technology.

VISION

In our long-term vision, we aim to play a leading role in inspiring sustainable surface technology within the world of architecture and construction.

STUCLINE

Ariomat offers unique coatings for unique surfaces. Alongside our WoodLine products, we also manufacture and sell our StucLine products. Find more information here: ariomat.com/stucline

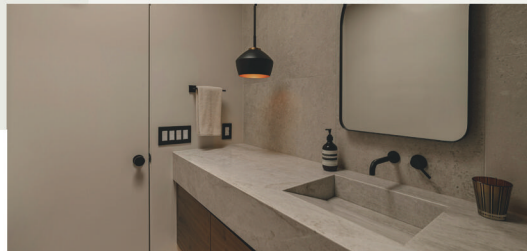




TABLE OF CONTENTS

INDOOR	Prep.
	Finishing
	Protection
	Maintenance
OUTDOOR	Finishing and protection all-in-one

Wood FibrePrep	08
Wood Colour Base	12
Wood Aging Base	14
Wood Hardwax Oil	18
Wood Varnish	22
Wood Varnish Eco	24
Wood Maintenance Oil	28
Wood Soap	30
Wood Hydro Shield	34
Wood Hydro Shield 360	38
Wood Hydro Shield SSB	40
Wood Hydro Shield SSB FS	42



INDOOR

Preparation

WOOD FIBREPREP

Innovative preparation product that removes dust particles, opens the wood grain, and ensures deeper colouring and optimal adhesion. To be used as a pretreatment for Wood Colour Base, Wood Aging Base, Wood Varnish (ECO) and Wood Hardwax Oil.




# layers	1
Consumption	10-12 m ² /L
Drying time	2h (20°C and 65% relative humidity)
Application	Microfibre cloth (manually or brush)
VOC content	< 5% VOC
Applicable on	All types of indoor wood



Available in:

1 L • 5L

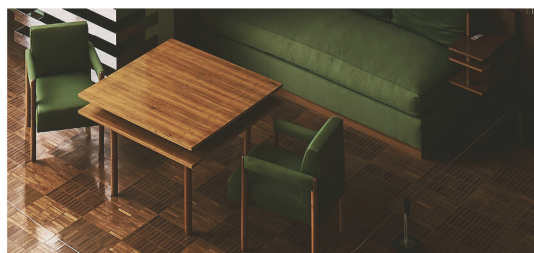





INDOOR

Finishing

WOOD COLOUR BASE


Non-reactive water-based wood stains that are applied as a base colour to create more even colour nuances and combinations. VOC-free, no overlapping, good colour stability, easy to apply. For indoor use.

# layers	1
Consumption	8-14 m ² /L
Drying time	2h before applying topcoat
Colours	See colour chart
	Spray gun, roller, brush or buffing machine (white pad). Wipe dry with cloth in the direction of the wood grain until the colour doesn't change anymore (not necessary with buffing machine).
Topcoats	Wood Varnish (ECO) or Wood Hardwax Oil



Available in:







100 ML • 500 ML • 1 L

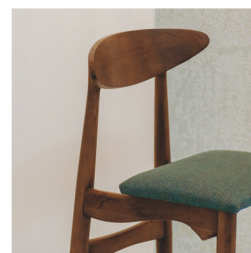

COLOUR CHART

Overview of our 6 standard **Wood Colour Base** colours.

Disclaimer: The colours shown below are for illustrative purposes only and may differ from the actual colour.

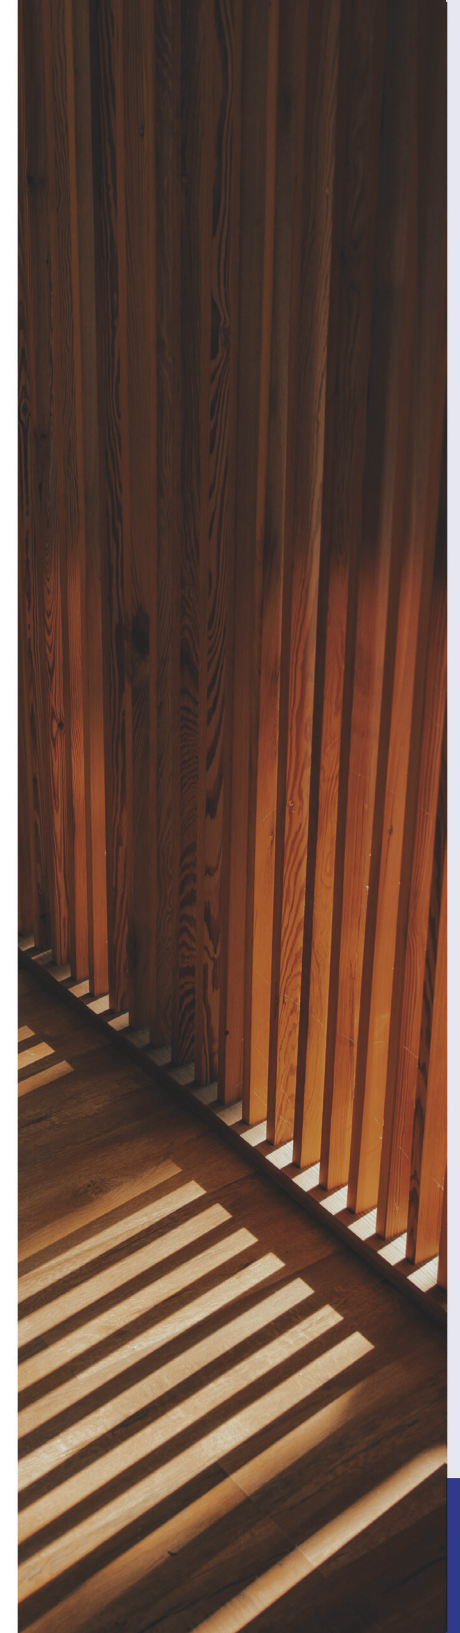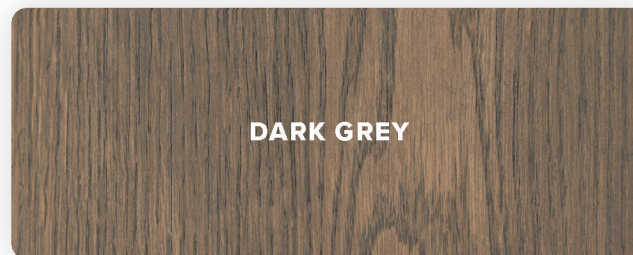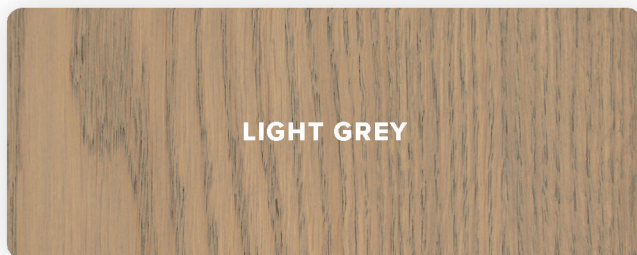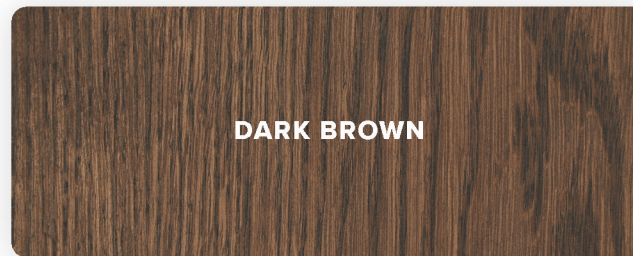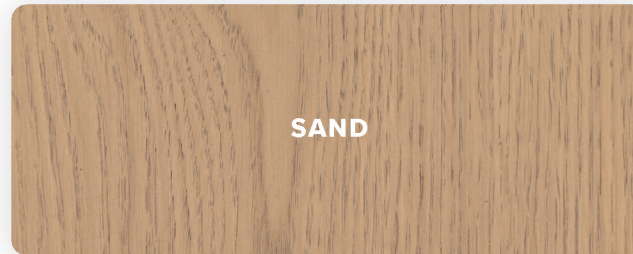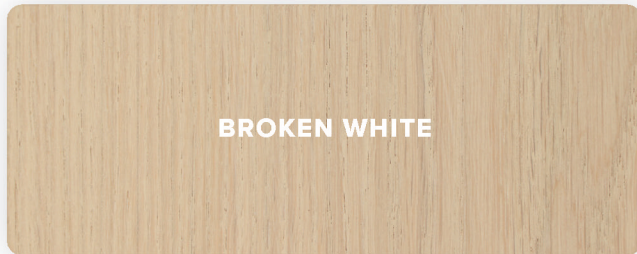

WOOD AGING BASE

Non-reactive wood stains to create smoked, aged, and fumed effects. VOC-free, no overlapping, good colour stability, easy to apply. For indoor use.



# layers	1
Consumption	8-14 m ² /L
Drying time	2h before applying topcoat
Colours	See colour chart
Application	Spray gun, roller, brush or buffing machine (white pad). Wipe dry with cloth in the direction of the wood grain until the colour doesn't change anymore (not necessary with buffing machine).
Topcoats	Wood Varnish (ECO) or Wood Hardwax Oil



Available in:





100 ML • 500 ML • 1 L



COLOUR CHART

Overview of our 6 standard **Wood Aging Base** colours.

Disclaimer: The colours shown below are for illustrative purposes only and may differ from the actual colour.

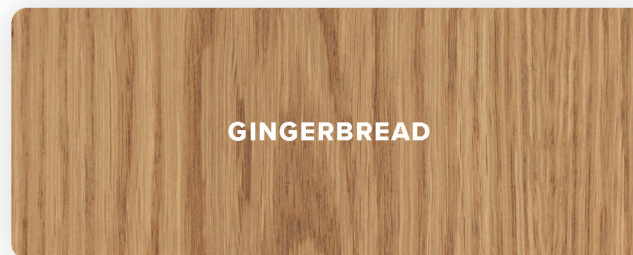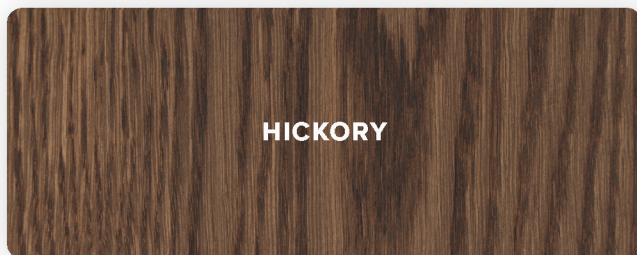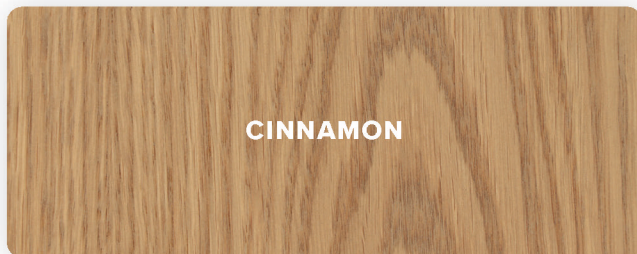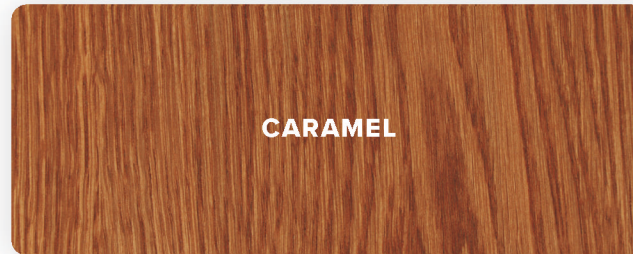



INDOOR

Protection

WOOD HARDWAX OIL

2 component Hardwax Oil based on high-quality natural oils for the decorative protection of indoor wood, MDF, etc. in a single layer. VOC-free, suitable for horizontal and vertical wooden surfaces, provides colour and protection in just one coat, easy to apply on all types of wood, no overlaps, long pot life of the mixture A+B: remains usable for days, if not weeks, after proper sealing. Easy to maintain and renovate.

Consumption	30-50 m ² /L
Application	By roller, cloth or buffing machine
Natural ingredients	Based on high-quality and natural oils for the decorative protection of indoor wood
VOC	< 0.5 % (conform EU Decopaint Directive)
Colours	See colour chart



Available in:

Part A 100 ML • 500 ML • 1 L • 5 L

Part B 100 ML • 1 L



COLOUR CHART

Overview of our 22 standard **Hardwax Oil** colours.

Disclaimer: The colours shown below are for illustrative purposes only and may differ from the actual colour.

CLEAR

NATURAL WHITE

PAPER WHITE

MISTY WHITE

BEAVER BROWN

TOFFEE BROWN



INDOOR

Protection

WOOD HARDWAX OIL

COFFEE BROWN

COSMIC BLACK

HAPPY GRAIN

BALATA

BEACH VIEW

JEWEL CUT

SUGAR BROWN


MONKEY NUT



MISTY LEMON



SMASHED BEANS

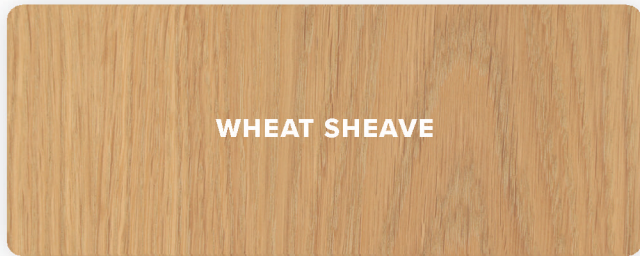

WHEAT SHEAVE




BUTTER COOKIE




SURICATE




STRAW

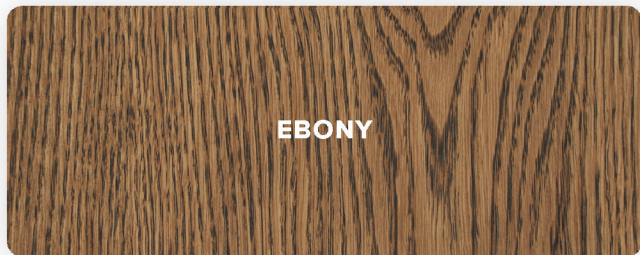

EBONY

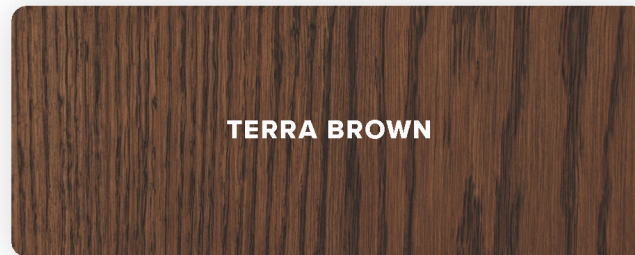

TERRA BROWN

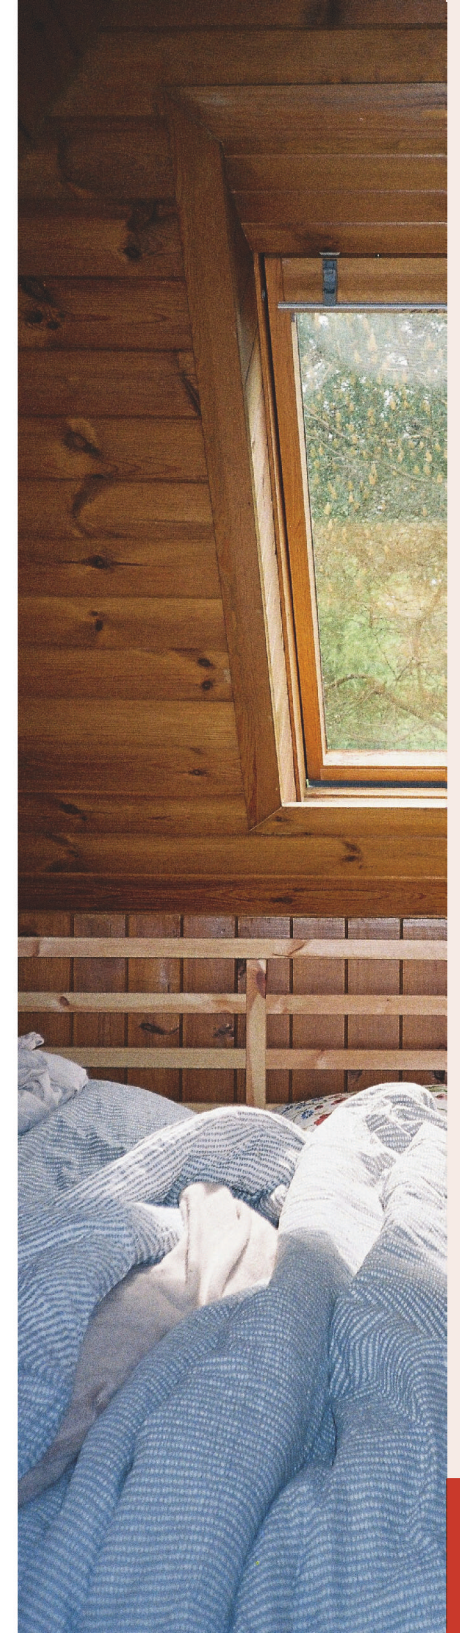

WOOD VARNISH



Water-based 2 component, colourless and protective varnish with high resistance to wear and water. Three versions: X-Matt, Matt and Satin. Hides surface imperfections, no discolouration, easy to apply, durable, natural wood appearance, odourless, and with X-Matt an invisible look is achievable without overlapping. For indoor use. Can also be applied on top of Wood Hardwax Oil.



# layers	2-3
Consumption	18 m ² /L
First coat	Drying time: approx. 1h, max cons.: 130 g/m ²
Second coat	Drying time: approx. 2-3h, max cons.: 100 g/m ²
Third coat	Drying time: approx. 2-3h, max cons.: 100 g/m ²
Waiting time	Between layers: 3-5 h
VOC	< 20 g/L (Conform Decopaint Directive 2010/75 EU)
Application	Industrially (spray gun/airless) & on-site (roller/brush)



Available in:

Part A 1 L • 5 L • 20 L

Part B 100 ML • 1 L • 5 L

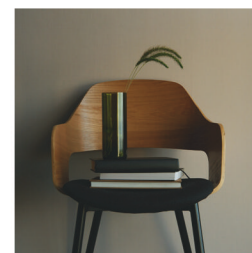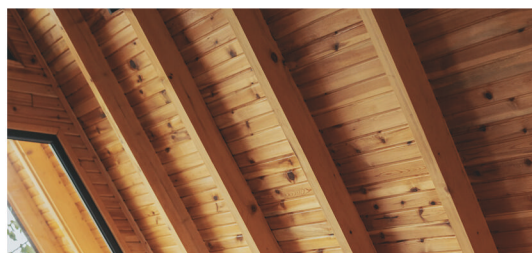



WOOD VARNISH ECO

A water-based, 2 component, colourless protective varnish based on the proven Wood Varnish technology, developed as a variant with a significantly longer open time and a zero VOC content. Available in X-Matt, it offers high resistance to wear and water, effectively hides small surface imperfections without discolouration, and preserves the natural look of wood. The Wood Varnish ECO X-Matt provides a fully invisible, overlap-free finish. Suitable for interior use and can also be applied over Wood Hardwax Oil.


# layers	2-3
Consumption	18 m ² /L
First coat	Drying time: approx. 1h, max cons.: 130 g/m ²
Second coat	Drying time: approx. 2-3h, max cons.: 100 g/m ²
Third coat	Drying time: approx. 2-3h, max cons.: 100 g/m ²
Waiting time	Between layers: 3-5 h
VOC	Zero VOC (Conform Decopaint Directive 2010/75 EU)
Application	Industrially (spray gun/airless) & on-site (roller/brush)



Available in:

Part A 1 L • 5 L • 20 L

Part B 100 ML • 1 L • 5 L

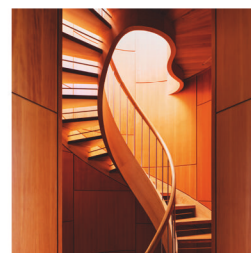





INDOOR

Maintenance

WOOD MAINTENANCE OIL



One-coat maintenance oil for indoor use, designed to refresh and renovate oiled wood or to repair small cracks in the varnish on varnished wood. It is recommended to treat high-wear areas with Wood Maintenance Oil before the colour begins to fade.

# layers	1
Consumption	150 m ² /L
Drying time	6-8h
Application	Microfibre cloth or cleaning mop
VOC content	< 5% VOC
Applicable on	All types of indoor wood



Available in:

1 L

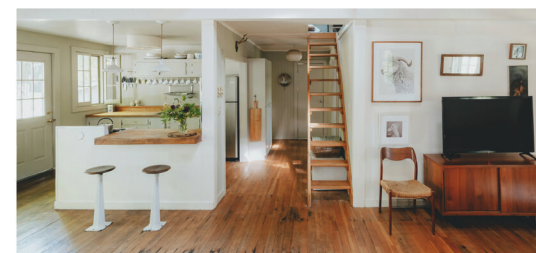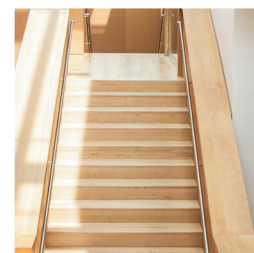



WOOD SOAP


Environmentally friendly, neutral and concentrated high-quality soap, for use on surfaces coated with Wood Hardwax Oil and Wood Varnish (ECO). VOC-free, concentrated, dilutable in water, efficient for cleaning all treated wood surfaces.

Dilution	100-250 ml/10 L water
Drying time	minutes



Available in:

1 L

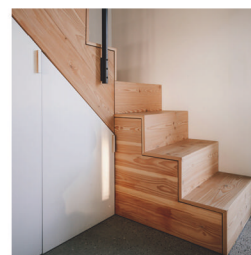





OUTDOOR

Finishing & Protection

WOOD HYDRO SHIELD


Single-layered, waterborne, breathable, durable, clear or coloured finishing and protection in 1, applicable on vertical outdoor and indoor wood. Optimal wood penetration and saturation, hydrophobic and breathable. Protects against weathering, UV and fungi. Easy to apply without overlapping and very durable. (Complies with **DIN EN-927-6**: Exposure of wood coatings to artificial weathering using fluorescent UV lamps and water.)



Consumption	80-100gr/m ²
Colours	See colour chart
Application	Industrially (spraygun/airless) or on-site (roller/brush/cloth/sponge)

Available in:


500 ML • 1 L • 2,5 L • 5 L • 20 L • 120 L

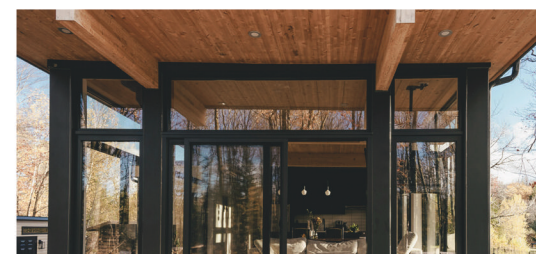

COLOUR CHART

Overview of our 17 standard **Wood Hydro Shield** colours.

Disclaimer: The colours shown below are for illustrative purposes only and may differ from the actual colour.

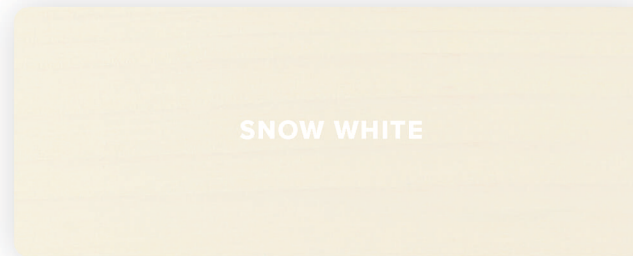

OUTDOOR

Finishing & Protection

PALE BLUE

SHARK GREY

KOALA BROWN


ASPHALT GREY

BISCUIT BROWN

WHALE GREY

COHIBA BROWN

INTENSE BLACK

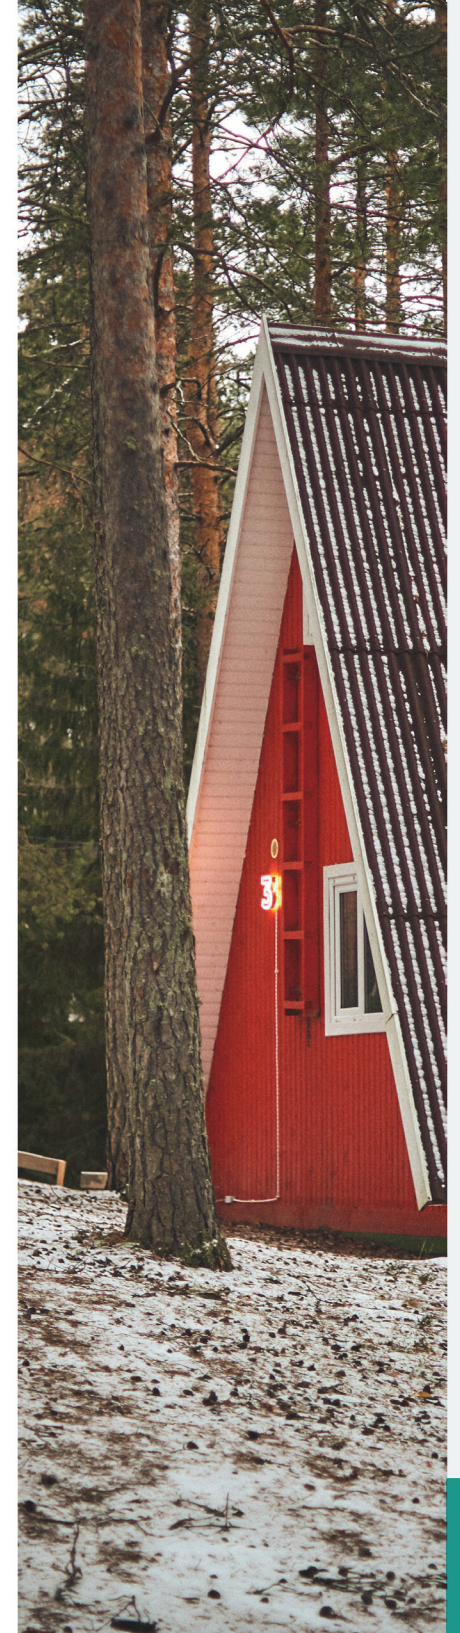

HYDRO SHIELD 360

Developed with innovative Wood Hydro Shield Technology, this one-coat, water-based, vapour-open finish and protection system is suitable for both vertical and horizontal wood surfaces, indoors and outdoors. It provides optimal penetration and saturation of the wood, combines hydrophobic and breathable properties, and offers durable protection against weathering, UV radiation and fungi. Easy to apply without overlaps, it ensures a highly durable and natural-looking finish.

Consumption	80-100gr/m ²
Colours	See colour chart
Application	Industrially (spraygun/airless) or on-site (roller/brush/cloth/sponge)



Available in:

500 ML • 1 L • 2,5 L • 5 L • 20 L • 120 L

COLOUR CHART

Overview of our 8 standard **Wood Hydro Shield 360** colours.

Disclaimer: The colours shown below are for illustrative purposes only and may differ from the actual colour.



IVORY WHITE




GRANITE GREY



MIDNIGHT BLACK



OLIVE GREEN

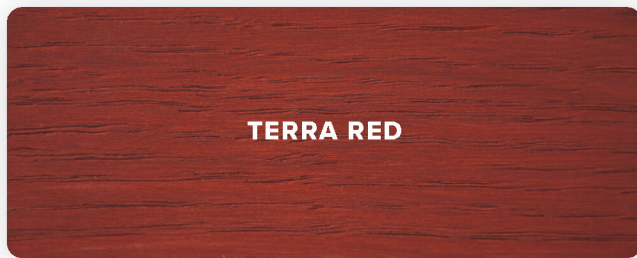


TERRA RED




AUTUMN BROWN



CHESTNUT BROWN

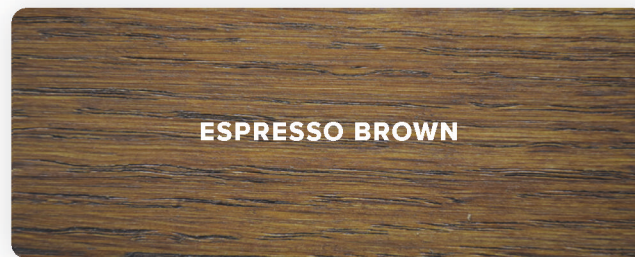

ESPRESSO BROWN

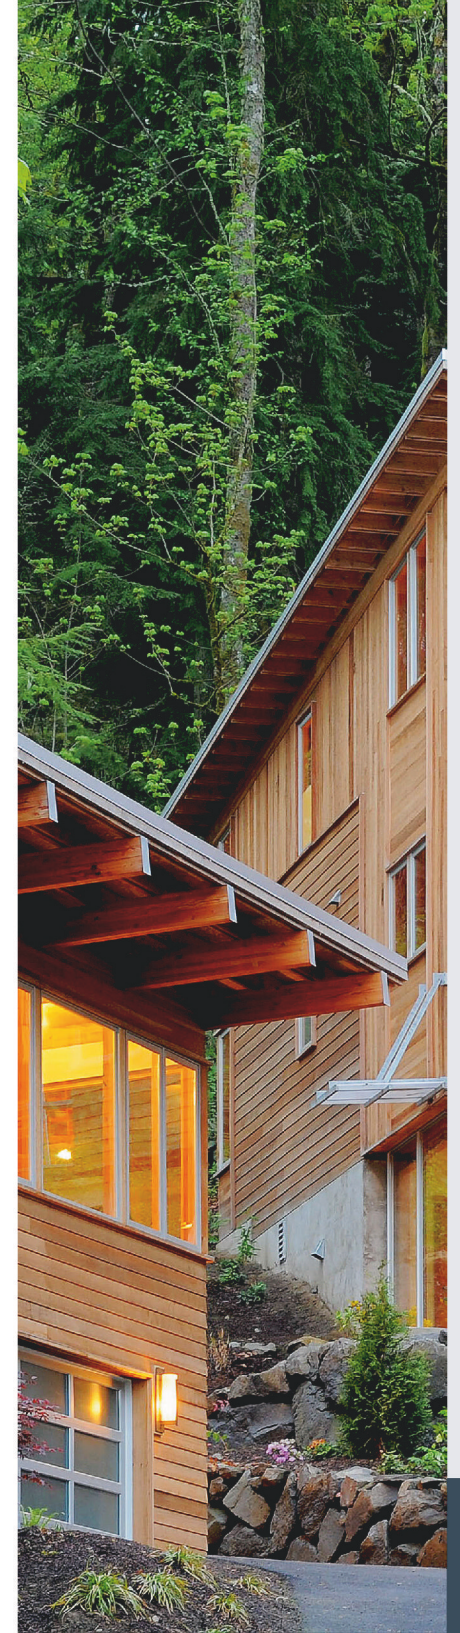

WOOD HYDRO SHIELD 360

HYDRO SHIELD SSB

(Burned Wood)


Wood Hydro Shield SSB is a waterborne, durable, strengthening and protective treatment for burned wood outdoor and indoor. Fixates the soot and maintains the natural character of the wood, hydrophobic and durable, transparent or black, matt or satin, good UV-protection, easy to apply. Applicable on lightly burned (and/or brushed) wood.



# layers	Single layered due to high active ingredients
Colour	Transparent or black
Application	Industrially (spraygun/airless) & on-site (roller/brush)

Available in:

5 L • 20 L • 120 L

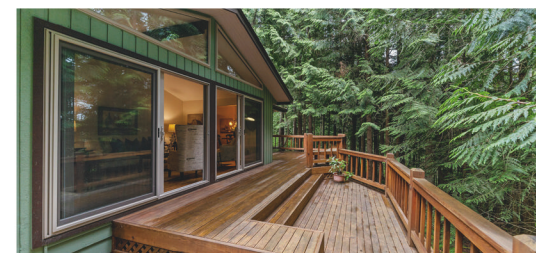



HYDRO SHIELD SSB FS

Full Solid (Burned Wood)

Wood Hydro Shield SSB FS is a 100% solids, durable protector, specially developed for the finishing of **heavily** burned wood for indoor and outdoor use. Hydro Shield SSB FS fills up all the air voids of the charred surface and solidifies during curing. This guarantees a super surface without changing the look of the burned wood.




# layers	Only 1 treatment, due to high active ingredient.
Colour	Transparent or black
Application	Spray: Apply only one coat. Make sure to remove all excess material that has not penetrated into the charred surface. By brush: Apply once with a soft brush. All excess material on the surface of the boards must be removed to avoid glossy spots.

Available in:

5 L • 20 L







www.ariomat.com

Ariomat is a factory brand of Sobeltec nv
Klein Frankrijkstraat 43, 9600 Ronse
Belgium.

www.ariomat.com | +32 (0)55 230 600 | info@ariomat.com



ARIOMAT[®]



www.ariomat.com

Ariomat is a factory brand of Sobeltec nv
Klein Frankrijkstraat 43, 9600 Ronse
Belgium.

www.ariomat.com | +32 (0)55 230 600 | info@ariomat.com